



Film Capacitors – Power Factor Correction

Dynamic and Hybrid Power Factor Controller


Series/Type: BR7000-I-TH, BR7000-I-TH/S485
Ordering code: B44066R7412E230/B44066R7612E230
Date: March 2014
Version: 1

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

Characteristics

- 12 transistor and 12 relay outputs
- Direct triggering of up to 32 thyristor switches
TSM-LC-S at the bus; bi-directional communication;
design of self-monitoring dynamic systems with
bus coupling (only version /S485)
- 20 pre-programmed control series
- Control series editor
- Full graphic display 128 x 64 pixel
- Plain language menu
- 4-quadrant-operation
- Display of multiple grid parameters
- Display of harmonics (up to 33rd)
- Display of distortion factor THD-V/THD-I
- Display and control of temperature
- Storage of maximum values
- Storage of switching operations and times (relay outputs)
- Manual and automatic operation
- Zero voltage cut-off
- Various error messages/alarm relay
- Error storage
- Interface RS485 for version -/S485
- Panel mounting 144 x 144 x 55 mm

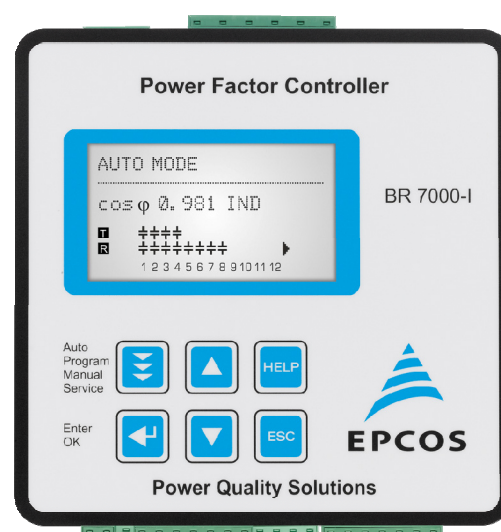

Inputs

- Operation voltage: 110 ... 230 V AC +/- 15%
- Measuring voltage: 30 ... 440 V AC (L-N) / 50 ... 760 V AC (L-L)
- Current: X:1A / X:5A
- Standard serial interface (e.g. for firmware update)
- Version -/S485: 1 external input

Outputs

- 12 relay outputs
- 12 transistor outputs
- 1 relay output (alarm/fan)
- Version -/S485: 1 message relay (free programmable)
- Version -/S485: interface RS485

Measuring and display of following grid parameters

- Voltage, current, frequency
- Active, reactive and apparent power
- Power factor, missing reactive power
- Harmonics of voltage (up to 33rd/even up to 16th)
- Harmonic of current (up to 33rd/even up to 16th)
- TDH-V, THD-I
- Temperature
- Well-arranged display of power factor and actual status of switching outputs
- Display and storage of maximum values, switching operations and operation time (only static stages)
- Display of harmonics as bar chart

Operation

- Graphic display 164 x 64 dots with 8 lines maximum
- Plain language menu in several languages
- Optimum navigation in the menus via return (ESCAPE) button
- HELP-button for interactive help text

Version with interface (BR7000-1-TH/S485)

- Additional potential free input (programmable) for
 - Switch over 2nd target cos-phi
 - Triggering of a reactive power off-set
- Additional potential free relay output (message relay) for
 - Switching of a fan
 - Display of error- or status messages (programmable)
- Interface RS485 (MODBUS RTU) for
 - Direct triggering of up to 32 addressable thyristor switches TSM-LC-S with bi-directional communication
 - Imbedding of the controller into a network
 - Usage of software BR7000-Soft
 - Output of measured values in ACSII-protocol
- Internal battery-buffered clock for
 - Creation of time stamp of all recorded maximum values
 - Creation of time stamp for all error messages

Technical data and specifications

Operating voltage	110 ... 230 V AC +/- 15 %, 50 and 60 Hz
Measuring voltage	30 ... 440 V AC (L-N); 50 ... 760 V AC (L-L); 50/60 Hz
Measuring current	X: 5 A / X: 1 A, selectable
Power consumption	< 5 VA
Sensitivity	50 mA/10 mA

Switching outputs

Relay outputs for capacitor contactors	12
Transistor outputs for thyristor switches	12
Alarm relay	1
Message relay	1 for version -/S485 only
Switching power of relays	250 V AC, 1000 W
Switching power of thyristors	24 V DC, 50 mA
Number of active outputs	Programmable

Operation and display

Display	Illuminated full graphic display 128 x 64 dots
Menu languages	CZ/EN/ES/FR/GER/NL/PL/PT/RU/TR
Freely editable control series	1 via Editor

Control

Control principle	Sequential switching, circle switching, intelligent switching behavior, 4-quadrant operation
Operation modes	Dynamic or hybrid PF-controller
Target cos-φ	0.1 inductive up to 0.1 capacitive adjustable
Switch on time (dynamic/relay)	20 ... 1000 ms / 1 sec ... 20 min
Switch off time	20 ... 1000 ms / 1 sec ... 20 min
Discharge time	20 ... 1000 ms / 1 sec ... 20 min
Manual operation	Yes
Fixed steps/skip steps	Programmable
Zero voltage release	Standard

Display/display functions

Display of grid parameters	Cos-φ, V, I, f, W, Q, P, S, ΔQ, THD-V, THD-I
Display of harmonics	3 rd to 33 rd harmonics of V and I; even harmonics up to 16 th
Accuracy	Current/voltage: 1% Active, apparent and reactive power: 2%
Integrated help function	Context dependent (German/English)

Storage function	
Storage of maximum values	Voltage, current, active/reactive/apparent power, temperature, THD-V, THD-I
Storage of switching operations	Each output can be reset separately (only contactor stages)
Storage of operation time	Each capacitor can be reset separately (only contactor stages)
Error storage	Error register in plain language
Temperature monitoring	
Monitoring	Automatic step switch off
Temperature measuring range	-30 ... +100 °C
Casing	
Panel mounted instrument	DIN 43700, 144 x 144 x 55 mm
Weight	1 kg
Ambient operating temperature	-20 ... +60 °C
Protection class accord. DIN 40050	Front: IP54, rear: IP 20
Safety regulations	IEC 601010-1
Interference resistance	IEC 61000-6-2; EN 61326
EMC-interference	IEC 61000-4-2; IEC61000-4-4
Ordering codes	
BR7000-I-TH (without interface)	B44066R7412E230
BR7000-I-TH/S485 (with interface RS485)	B44066R7612E230

Cautions and Warnings

Controller hunting: When putting the capacitor bank into operation, it is required to avoid needless switching cycles (means permanent switching on and off of steps without significant change of consumer load). This so called “controller hunting” would increase the number of switching operations of the connected contactors and capacitors and decrease the expected life cycle (wear out) and, in worst case, capacitor bursting and fire, etc. This can be avoided by a proper programming of the BR7000-I-TH and BR7000-I-TH/S485 with the actual system parameters (current transformer prim. and sec., first kvar step, control series, switching time).

⚠ Please read cautions information about PFC capacitors and cautions as well as installation and maintenance instructions in the actual version of the Product Profile *Power Factor Correction* to ensure optimum performance and prevent products from failing, and in worst case, bursting and fire, etc. The actual Product Profile is available at www.epcos.com/publications.

Information given in the PFC-product profile and values given in the data sheet reflect typical specifications. You are kindly requested to approve our product specifications or request our approval for your specification before ordering.

Note

For detailed information about PFC capacitors and cautions, refer to the latest version of EPCOS PFC Product Profile.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.tdk-electronics.tdk.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to our General Terms and Conditions of Supply**.
7. **Our manufacturing sites serving the automotive business apply the IATF 16949 standard**. The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that **only requirements mutually agreed upon can and will be implemented in our Quality Management System**. For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.
8. The trade names EPCOS, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.tdk-electronics.tdk.com/trademarks.

Release 2018-10